

**PermaroofUK**  
The Permanent Roof People **Limited**



# Roofing Catalogue

2020



# Contents

<b>FIRESTONE EPDM</b>	<b>1</b>
<b>SPECIAL USE EPDM</b>	<b>2</b>
<b>FIRESTONE ADHESIVE</b>	<b>3</b>
<b>PERMAROOF ADHESIVE</b>	<b>4</b>
<b>RUBBERTOP FLEECE EPDM &amp; ACCESSORIES</b>	<b>5-7</b>
<b>TRIMS</b>	<b>8-11</b>
<b>TRIM ACCESSORIES</b>	<b>12-13</b>
<b>FIRESTONE ACCESSORIES</b>	<b>14-17</b>
<b>TAPES &amp; OUTLETS</b>	<b>18 -20</b>
<b>PERMATILE</b>	<b>21</b>
<b>FIXINGS</b>	<b>22</b>
<b>SHED ROOF KITS</b>	<b>22</b>
<b>TOOLS</b>	<b>23-25</b>
<b>INSULATION AND ACCESSORIES</b>	<b>26-27</b>
<b>PERMAROOF 500</b>	<b>28</b>
<b>ACCESSORIES &amp; EXTRAS</b>	<b>29-32</b>
<b>SALES TOOLS</b>	<b>33</b>



# FIRESTONE EPDM

## Firestone EPDM Membranes cut to size

Delivered next day to your door, nationally.....

045 (1.14mm)

060 (1.52mm)

FR (Flame Retardant 1.14mm)

## Rubbercover™ EPDM Roll sizes

### Mini roll sizes

3.05m x 7.62m

4.57m x 7.62m

6.1m x 7.62m

### Half roll sizes

3.05m x 15.25m

4.57m x 15.25m

6.1m x 15.25m

7.62m x 15.25m

### Full roll sizes

1.0m x 30.5m

1.5m x 30.5m

2.0m x 30.5m

2.54m x 30.5m

3.05m x 30.5m

3.66m x 30.5m

3.66m x 61m

3.96m x 30.5m

3.96m x 61m

4.57m x 30.5m

5.08m x 30.5m One fold

6.1m x 30.5m

7.62m x 30.5m

9.15m x 30.5m

12.2m x 30.5m

15.25m x 30.5m



## FIRESTONE EPDM MAX

Firestone MAX reinforced EPDM membrane is a 100% cured roofing membrane made of synthetic rubber EPDM. The Firestone MAX sheet is made of two plies of standard compound, internally reinforced with a high strength polyester weft scrim. This is a one piece system, high performing membrane used for a variety of flat roofing applications.



**WE ALWAYS HAVE DEALS FOR BULK AND LARGE ORDERS.**

**CALL US WITH YOUR REQUIREMENTS TODAY**

**Orders 0800 161 3722**



## SPECIAL USE EPDM

### FIRESTONE 1MM FACADE EPDM

The unique Permaroof Epdm waterproofing system is the perfect solution to achieving a permanent waterproofing seal around penetrations in curtain walling situations i.e commercial offices, concrete structures etc.

Roll sizes

- 100mm x 20m
- 150mm x 20m
- 200mm x 20m
- 300mm x 20m
- 350mm x 20m



Bespoke widths available call for more details.

### PERMAROOF 0.75MM FACADE EPDM

The unique Permaroof Epdm waterproofing system is the perfect solution to achieving a permanent waterproofing seal around penetrations in curtain walling situations i.e commercial offices, concrete structures etc.

Roll sizes

- 100mm x 20m
- 150mm x 20m
- 200mm x 20m
- 300mm x 20m
- 350mm x 20m



Bespoke widths available call for more details.

### ULTRABOND SEALANT

A specially formulated sealant designed for maximum adhesion to single ply membranes.



# Orders 0800 161 3722



# FIRESTONE ADHESIVE

## FIRESTONE WATER-BASED ADHESIVE (WHITE)

20L Tub (approx. 80M<sup>2</sup> Coverage)

10L Tin (approx. 40M<sup>2</sup> Coverage)

5L Tin (approx. 20M<sup>2</sup> Coverage) 2.5L Tin

(approx. 10M<sup>2</sup> Coverage)



### GENUINE FIRESTONE BRAND GUARANTEE – BEWARE OF IMITATIONS

DO NOT LET THIS PRODUCT FREEZE!

Used for fully adhering rubber membrane to timber decks. Remember:  
timber deck application only.

## FIRESTONE BONDING ADHESIVE (Green)

10L Tin (approx. 30M<sup>2</sup> Coverage)

5L Tin (approx. 15M<sup>2</sup> Coverage)

2.5L Tin (approx. 7.0M<sup>2</sup> Coverage)



## FIRESTONE BONDING ADHESIVE SPRAY

17kg (approx. 75M<sup>2</sup> Coverage)

Used with spray gun and hose (see tools page 23-25)

750ml aerosols (approx 3 M<sup>2</sup> coverage)

Commonly used for bonding around the edges of a roof and brick upstands. Remember: both EPDM and mating surface need to be tacky before offering together.



# Orders 0800 161 3722



## QUICKPRIME PLUS

3.78L Tin

1L Tin

Must be used in conjunction with all Quickseam accessories.

Applied with quick scrubber pads.

To be used when detailing with formflash, seam tape, coverstrips, pipe boots, and walkway pads. Remember: this needs to be tacky before it will work!

## PERMAROOF ADHESIVE

### PERMAROOF WATER-BASED ADHESIVE

10L Tin (approx. 40M<sup>2</sup> Coverage)

5L Tin (approx. 20M<sup>2</sup> Coverage)

2.5L Tin (approx. 10M<sup>2</sup> Coverage)

**DO NOT LET THIS PRODUCT FREEZE!**

Used for fully adhering rubber membrane to timber decks.  
Remember: timber deck application only.



### PERMAROOF BONDING ADHESIVE

10L Tin (approx. 20M<sup>2</sup> Coverage)

5L Tin (approx. 10M<sup>2</sup> Coverage)

2.5L Tin (approx. 5.0M<sup>2</sup> Coverage)

Commonly used for bonding around the edges of a roof and brick upstands.

**Remember: both EPDM and mating surface need to be tacky before offering together.**



## RubberTop Fleece-Backed EPDM Membrane

Fleece-backed EPDM membrane. Join additional panels on site using tapes. Sold in full rolls, or cut to length by your local distributor.

Thickness	Width	Length	Roll Area (m <sup>2</sup> )
2.3mm thick	1.78m	20m*	35.60m <sup>2</sup>
2.3mm thick	1.78m	60m*	106.80m <sup>2</sup>
2.3mm thick	3.4m	20m*	68m <sup>2</sup>



## PUR Adhesive 3200

Polyurethane adhesive for use on the deck. Coverage rates are approximate depending on the substrate.

Packaged	Coverage	Shelf Life
10kg can	33m <sup>2</sup> per can	9 months
20kg can	66m <sup>2</sup> per can	9 months



## E245 Spraybond Adhesive

Quick drying sprayable contact adhesive. Spray hose, hand gun and cleaner sold separately.

**Note: Not suitable for use on bitumen**

Packaged	Coverage	Shelf Life
19L cannister	Approx 75m <sup>2</sup> /cannister	18 months



## Contact Adhesive 5000

For adhering RubberTop EPDM membrane at perimeters and upstands or on small deck areas and details to substrates such as wood, concrete and metals.

Packaged	Coverage	Shelf Life
4.9 litre tin	8.5m <sup>2</sup> per tin	12 months



## Single Ply Tape Primer

Solvent based primer used to prime RubberTop membrane, concrete, OSB, plywood and metal surfaces before applying tapes.

Packaged	Coverage	Shelf Life
0.9 litre can	5-6m <sup>2</sup> per litre	18 months
3.8 litre can	5-6m <sup>2</sup> per litre	18 months



# Orders 0800 161 3722

## Cleaning Wash 9700

Technical petrol used for cleaning RubberTop membrane before applying tapes.

Packaged	Coverage	Shelf Life
1 litre bottle	4-5m <sup>2</sup> per bottle	6 mths (unopened)
5 litre can	23m <sup>2</sup> per can	6 mths (unopened)



## Sealant 5590

Natural, elastic, one component silicone based sealant used for sealing against substrates, termination bars and metal flashings.


Packaged	Coverage	Shelf Life
310 ml tubes (15 /box)	8-12 Lin M per tube	12 months



## Circular Corner Patch

Circular self-adhesive corner patch for sealing internal and external corners.

Packaged	Dimensions	
Each or 100/box	203mm diameter	



## EPDM Pipe Boot

Self-adhesive base with pressure sensitive tape. Supplied with clamp.

Packaged	Dimensions	
Each or 10/box	Suit 25mm – 150mm dia pipes	



## PE Outlet/Drain

EPDM outlet/drain

Pipe Diameter	Length	
75mm	380mm	
90mm	380mm	
110mm	380mm	
125mm	380mm	



## RubberTop Seam Tape

Double sided black pressure sensitive tape used for joining membrane panels. Use in conjunction with Tape Primer.



Width	Length	Roll Weight
75mm	30.5m	2.38kg

## RubberTop Flashing Tape

Self-adhesive mouldable EPDM membrane used for flashing roof penetrations, corners, pipes and T-Joints. Use in conjunction with Tape Primer.



Width	Length	Roll Weight
229mm	15.25m	9.3kg
305mm	15.25m	12.65kg

## RubberTop Cover Tape

Cured, self-adhesive membrane for covering mechanical fastening bars, or for repairs.



Width	Length	Roll Weight
152mm	30.5m	12.5kg

**RubberTop EPDM is an unreinforced EPDM rubber membrane for waterproofing flat roofs.**

Particularly suitable for the domestic market or for small to medium sized roofs, our prefabrication capabilities mean that large panels can be provided in a multiple of widths, which means the roof can often be waterproofed in one piece. These panels are produced in factory conditions, ensuring quality and integrity at all times.

# Orders 0800 161 3722

# PERMAROOF CLASSIC TRIM

## PERMAROOF EDGE/KERB TRIM

Edge/Kerb Trim 65mm x 2.5M UPVC

Edge/Kerb Trim 65mm x 3.5M UPVC

Designed to fit over the edge of the roof, the profile of the trim forms the upstand and ensures the water is directed towards the gutter edge. Must be used in conjunction with foam tape or bond and seal.



Colours Available



Colours Available



## PERMAROOF TRIM GUTTER/DRIP TRIM

UPVC Gutter/Drip - 65mm x 2.5M 2 Part Trim

A unique patented design. Used along the gutter edge.

It sandwiches the roofing membrane eliminating penetration when fixing. It is a 2- part trim sold together.

## PERMAROOF TRIM INTERNAL / EXTERNAL CORNER

PERMAROOF UPVC Internal Corner / external corner

Colours Available



## PERMAROOF TRIM JOINT CLIP/BUTT STRAP

UPVC Joint Clip/Butt Strap  
40mm wide

Designed to be used with Permaroof edge trim only.

The joint clip is used for joining two pieces of edge trim together.

Designed to be used with Permaroof edge trim only.



Colours Available




## PERMAROOF TRIM END CAP LARGE /SMALL

UPVC Trim End Cap (Small)


Used for capping of the ends of the edge trim where they join each other or at an upstand.

UPVC Corner End Cap (Large)

Used to blank off the ends of the external corners where the Edge/Kerb trim meets the gutter edge.



Colours Available



## PERMAROOF PLUS EDGE TRIM

### PERMAROOF PLUS Edge Trim

125mm x 2.5M

Available in black, white or grey



Designed to fit over the edge of the roof, The profile of the trim forms the upstand and ensures the water is directed towards the gutter edge.

## PERMAROOF PLUS TRIM GUTTER/DRIP TRIM



PERMAROOF PLUS Gutter  
2 Part Trim - 75mm x 2.5M

Available in black, white and grey

## PERMAROOF PLUS TRIM INTERNAL CORNER

A unique patented design. Used along the gutter edge. It sandwiches the roofing Membrane eliminating penetration when fixing. It is a 2-part trim sold together  
PERMAROOF PLUS UPVC

90° Internal Corner

Available in black or white.

Designed to be used with Permaroof Plus Trim (edge trim only).



## PERMAROOF PLUS TRIM JOINT CLIP

PERMAROOF PLUS UPVC Joint Clip available in black or white.

Designed to be used with Permaroof Plus  
Trim (Edge trim only)

The joint clip is used for joining two pieces of edge trim together.

## PERMAROOF PLUS TRIM EXTERNAL CORNER

PERMAROOF PLUS UPVC

90° External Corner

Available in black or white.


Designed to be used with Permaroof Plus Trim (edge trim only)





# PERMAROOF TRIMS

## EPDM EDGE TRIM 2.5M (BLACK ONLY)

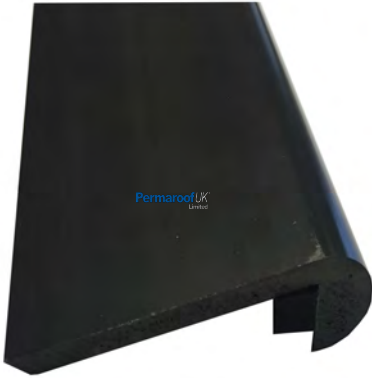

EPDM Edge trim 2.5m x 65mm pre foamed

Designed to fit over the edge of the roof, the profile of the trim forms the upstand and ensures the water is directed towards the gutter edge.

## EPDM TRIM EXTERNAL CORNER

Permaroof EPDM trim  
90° External Corner  
Available in black




## EPDM TRIM JOINT CLIP

The joint clip is used for joining two pieces of EPDM of edge trim together  
Designed to be used with EPDM Trim (Edge trim only)

## PERMAROOF UPVC WALL FLASHING

UPVC wall flashing 2M  
For flashing into brickwork

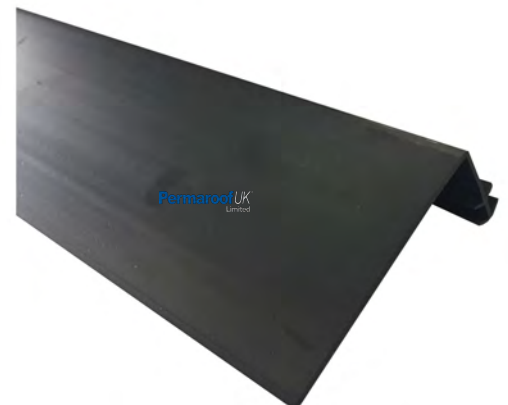

**Orders 0800 161 3722**



# PERMAROOF TRIMS

## PLASTISOL EDGING TRIM

Plastisol Edge Trim – 75mm (3”) x 3M

Plastisol Edge Trim – 100mm (4”) x 3M Plastisol Edge Trim –

125mm (5”) x 3M

3 metre length – Vertical Fix – 40mm top 10mm Lip

All trims are available in black, white & grey with a mottled effect finish.



## PLASTISOL GUTTER EDGE TRIM

Plastisol Gutter Trim – 70mm x 3M

3 metre length – Horizontal Fix – 40mm top Works in

conjunction with butyl edge tape.

All trims are available in black, white and grey with a mottled effect finish.



## PLASTISOL WALL FLASHING TRIM

Plastisol Wall Flashing Trim – 70mm x 3M 3 metre

length – Vertical Fix – 20mm top

All trims available in black with a mottled effect finish.



# Orders 0800 161 3722

## PERMAROOF TRIM BOND & SEAL SEALANT



Permaroof Bond & Seal Sealant Available in black

Designed to be used with Permaroof edge trim, end caps and corner details.

A specially formulated sealant designed for maximum adhesion to single ply membranes.

## PERMAROOF TRIM FOAM TAPE


PERMAROOF Trim Foam Tape

Roll size 8 metre

Designed to be used with Permaroof Trim

Edge/Kerb trim only.

Self adhesive tape applied to the base of the edge/kerb trim, designed to give a watertight seal on uneven surfaces

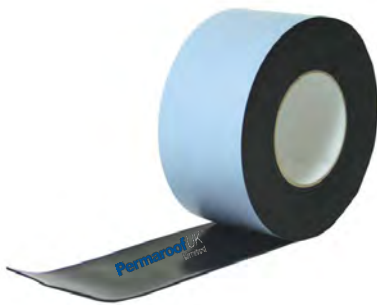

## BUTYL EDGE TAPE

Butyl Edge Tape 30 mtr Roll

Per Linear Metre

To be used with Plastisol trims.

This is a specially designed tape used underneath the metal trims where fixings penetrate the EPDM membrane.

It provides a watertight seal as the fixing goes through the membrane.

## POLYTOP NAILS

40mm Polytop nails x 100

50mm Polytop nails x 100

Available in black or white.

Used to fix Permaroof Trim Edge profile to fascia board.

Colours Available



# Orders 0800 161 3722



### Colours Available



## DELUXE FASTENERS

Deluxe Fasteners - Bag 100

Low profile carbon steel self drilling screws for fixing Plastisol trims and do not require covers.

Available in black, white or grey



## HEX TECH FIXINGS

Hex tech fixings - Bag of 100 To be used with Plastisol trims.



## HEX TECH COVERS

Hex Tech Covers - Bag of 100  
To be used with hex tech fixings. Available in Black or white

## WURTH COUNTERSUNK POZI SCREWS

- 4 X 30MM-BOX OF 500
- 4 X 40MM-BOX OF 500
- 4 X 50MM-BOX OF 500
- 4 X 60MM-BOX OF 250
- 4 X 70MM-BOX OF 500




# Orders 0800 161 3722

## BATTEN BAR

Batten Bar  
3 metre length.

For securing RPF & RMA strip to substrates. Use with Firestone All-purpose fasteners.

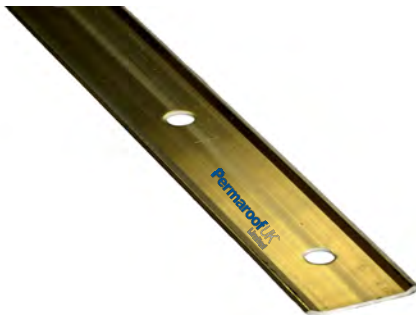

## TERMINATION BAR

Termination Bar 3 metre length.  
For securing roof terminations to adjacent flat roofs or upstands.  
Must be used in conjunction with Water Block Seal and All-Purpose fasteners.

## V-PLATE

V- Plate - Pail of 500 Or Per Plate 2 1/4" diameter fixing plate.

Used for RPF OR RMA strip installations



## INSULATION PLATE

Insulation Plate - Pail of 1000  
Or Per Plate

3" diameter fixing plate.  
Used for the attachment of insulation boards

## SPLICE-WASH MEMBRANE CLEANER

Membrane Cleaner 19L Tin

Membrane Cleaner 5L Tin

Used to clean EPDM prior to application of Splice Adhesive. Also useful for cleaning glue from scissors etc



# Orders 0800 161 3722



# FIRESTONE ACCESSORIES

## LAP SEALANT

Lap Sealant

For sealing cut edges of Quickseam Formflash.  
Used as a temporary sealant around cut edges of Quickseam Formflash. It protects the edges during the curing process, and will break up after a few weeks.



## WATER BLOCK SEALANT

Water Block Sealant

Use behind membrane when using termination bar.  
Also use with internal drain outlet, between outlet and membrane



## QUICKSEAM CORNER FLASHING

216 mm diameter patch  
Carton of 20 corners or per flashing

Used with Quickprime Plus only.

Used for flashing outside corners and for membrane repairs.



## QUICKSEAM MOULDED PIPE FLASHING

Used with Quickprime Plus only.

Used for flashing around pipes where the molded pipe flashing can be placed over the pipe.

The base of the flashing is bonded to the membrane using Quickprime Plus.




# Orders 0800 161 3722

## QUICKSEAM WALKWAY PAD

Walkway Pad  
760mm square

A reinforced EPDM anti-slip walkway pad. To be used where there is heavy foot traffic on the roof.

It is bonded to the EPDM membrane using Quickprime plus.

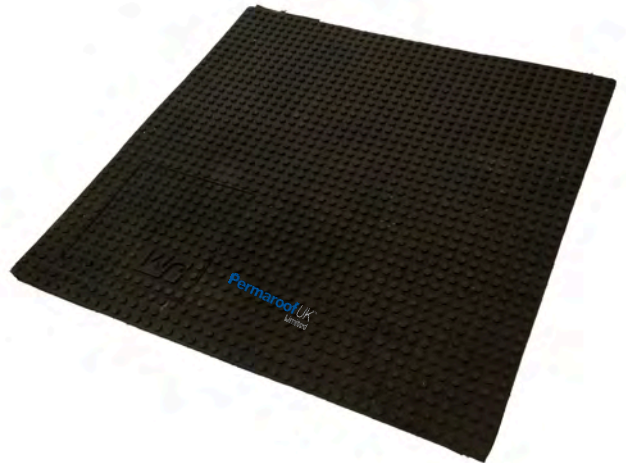

## 2 - PART POURABLE SEALANT

Firestone pourable sealer

Firestone pourable sealer is a two component sealer designed to create a watertight seal around small pipe penetrations, clusters of pipes, etc.



## FIRESTONE SPRAY CLEANER 500ML

Firestone cleaner 500ml

Is a powerful cleaner for efficient cleaning of adhesive. It has excellent dirt and grease removing action. Can also be used to clean spray gun nozzles and hoses.



# Orders 0800 161 3722



## FIRESTONE ACCESSORIES

### FIRESTONE ACRYLITOP COATING

Available in white or grey.

#### Features

It reflects about 68 percent of the sun's energy after just three years.

#### Benefits

- Extends the Roof's Life
- Substantial Energy Savings
- Decreased Pollution



### FIRESTONE V-FORCE VAPOUR BARRIER

Firestone V-Force™ Vapor Barrier Membrane is a vapour barrier comprised of SBS modified bitumen adhesive, factory-laminated to a tri-laminate woven, high-density polyethylene top surface.



A polymeric release liner protects the adhesive. V-Force membrane is intended for use as a vapour retarder in Firestone roofing systems and may be used as a temporary roof membrane for up to ninety (90) days.

### FIRESTONE V-FORCE PRIMER

Firestone SA-Solvent Based (SB) Primer contains synthetic polymers and adhesion-enhancing resins. Use to prime and prepare exterior concrete, metal, wood, plywood and gypsum surfaces to enhance the adhesion of Firestone V-Force™ Vapor Barrier Membranes, Enverge™ Air & Vapour Barrier SA Membranes, and CLAD-GARD™ Metal Roof Underlayment's.



# Orders 0800 161 3722



# PERMAROOF TAPES AND OUTLETS

## 9" 12" OR 18" FORMFLASH

15.25m Roll

Or per Linear Metre

Must be used with Quickprime Plus

Formed by hand around pipes, outside corners and areas of awkward detail.

An uncured EPDM flashing tape for detailing pipes, corners and joints, outlets etc.



## 5" FLASHING TAPE

30.5M Roll

Or per Linear Metre

Must be used with Quickprime Plus

A semi-cured flashing tape for flashing EPDM membrane to metal trims.

## 6" QUICKSEAM BATTEN COVER STRIP

30.5M Roll

7.62M Roll

Or per Linear Metre

Must be used with Quickprime Plus



## 18" QUICKSEAM SA FLASHING

15.25M Roll

Or per Linear Metre

Must be used with Quickprime Plus

Used for sealing drains, skylights, vents, gutters.



# Orders 0800 161 3722



# PERMAROOF TAPES AND OUTLETS




## 3" SEAM TAPE

30.5m Roll Or per Linear Metre  
Used with Quickprime Plus only.

A butyl-based rubber seam tape, for seaming two pieces of EPDM together.

## RPF STRIP

QuickSeam Reinforced Perimeter Fastening (RPF) Strip is a 6" (152.4 mm) wide RubberGard™ MAX membrane with 3" (76.2 mm) wide QuickSeam Tape factory laminated to it along one edge. It is used for non-penetrating flashings as specified in Firestone Specifications and Details.

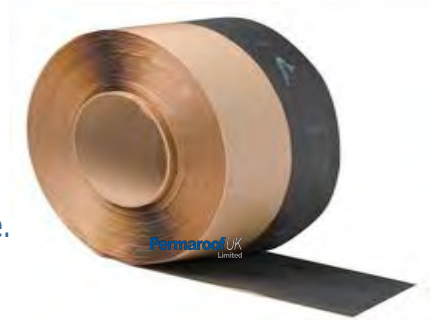

## RMA STRIP

10" wide RubberGard™ Max membrane with two 3" wide strips of quickseam tape.  
Used for roof membrane attachment beneath the Firestone EPDM membrane as additional membrane securement.

## EPDM DRAIN OUTLET

Available in sizes: 60mm 80mm 100mm 150mm

Used to drain rainwater through the deck into an outlet.  
Used as a water block check behind membrane.  
This product is not UV stable and it is vital that it is only used behind the membrane.



## UNIVERSAL LEAF GUARD

Leaf Guard

Used for attachment to an EPDM drain outlet



# Orders 0800 161 3722

## EPDM THRU WALL OUTLET 100MM

Roof outlets for corners and junctions between the roof and parapet wall

Square 100MM X 100M X 425MM



## SQUARE LEAF GUARD

Leaf Guard Used for attachment to an EPDM Thru wall outlet



## SPIGOT ELBOW

For use with EPDM thru wall outlets  
To take water away into a hopper



## FLAT ROOF AERATOR

Used for ventilating flat roofs,

Height : 160mm.

Diameter of the base plate / flange : 390mm.


Diameter of the flue or pipe at the bottom of the vent : 125mm.

Diameter of the flue or pipe at the top (where it meets the cap / hood) : 73mm.

Material : TPE - Plastic / Rubber compound.



# PROMENADE TILES

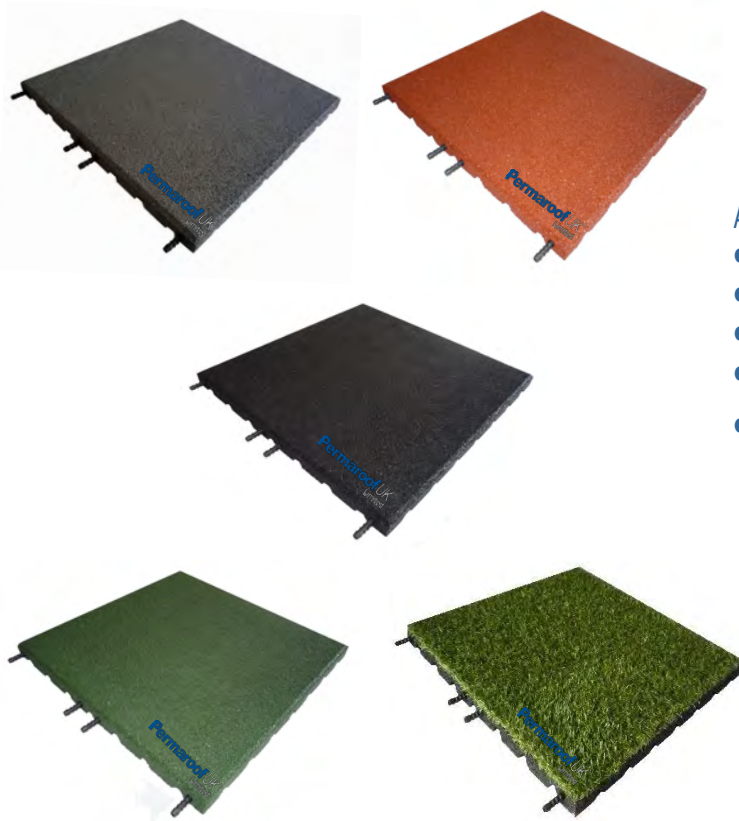

## Permatiles

PERFECT FOR EVERY FLAT ROOF APPLICATION

### Applications

- Balconies
- Flat roofs
- Terraces
- Patios
- Access walkways

### Colours available

- Charcoal Grey
- Rustic Red
- Carbon Black
- Artificial grass
- Forest Green
- Others available to order

Length 500MM X Width 500MM X 30MM thickness

## EPDM PAVING SUPPORT PAD

- A fast, labour saving way to lay paving
- Uniform paving provided by positioning lugs
- No need for mortar or pointing, reducing weight and mess
- No direct contact with insulation or waterproof membranes, avoiding damage and protecting from sunlight
- Paving can be taken up at any time to inspect deck, clean or carry out repairs
- Creates a void beneath the slabs for drainage




## QUICKSEAM WALKWAY PAD

Walkway Pad  
760mm square

A reinforced EPDM anti-slip walkway pad. To be used where there is heavy foot traffic on the roof.

It is bonded to the EPDM membrane using Quickprime plus.

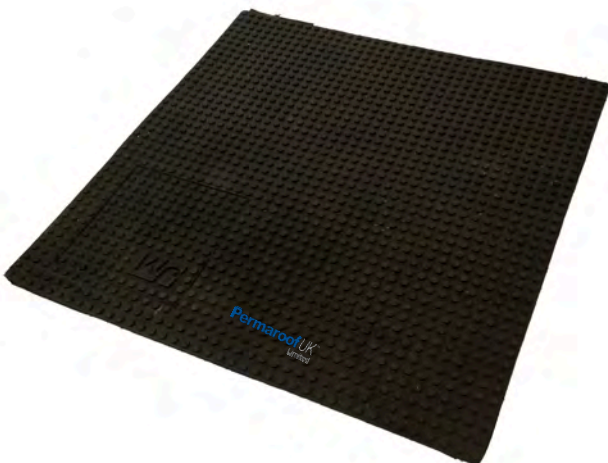

**Orders 0800 161 3722**



# PERMAROOF FIXINGS

## ALL PURPOSE FASTENERS

3.18cm	9.53cm
4.13cm	11.43cm
5.72cm	12.70cm
7.30cm	15.24cm
8.62cm	17.78cm



Used for the mechanical attachment of the EPDM membrane, insulation (using metal insulation plates) or accessories such as Batten Bars, Termination Bars etc, to steel, plywood and timber. No need for plugs (use 5.5mm Pilot in substrate. Can use directly into concrete).

## WURTH COUNTERSUNK POZI SCREWS



- 4 X 30MM-BOX OF 500
- 4 X 40MM-BOX OF 500
- 4 X 50MM-BOX OF 500
- 4 X 60MM-BOX OF 250
- 4 X 70MM-BOX OF 500

## PERMAROOF SHED IN A BOX®

- Shed Roof In A Box 1 6' X 4' (2M X 1.7M)
- Shed Roof In A Box 2 7' X 5' (2.4M X 2M)
- Shed Roof In A Box 3 8' X 6' (2.6M X 2.3M)
- Shed Roof In A Box 4 10' X 6' (3.3M X 2.3M)
- Shed Roof In A Box 5 10' X 8' (3.4M X 2.9M)





# PERMAROOF TOOLS

## 9" PLASTIC HANDLED PAINT ROLLER FRAME

Roller Frame

For applying Water-Based or Contact Adhesive.



## 9" CAGE ROLLER SLEEVE FOR ROLLER FRAME

Roller Sleeve

For applying Water-Based or Contact Adhesive.



## 4" MINI ROLLER FRAME

4" Mini Roller Frame

Used for applying Contact Adhesive



## REFILLS FOR MINI ROLLER FRAME

Refill Packs of 10 or 5

4" wide. For applying Contact Adhesive.



# Orders 0800 161 3722

## PENNY ROLLER

Penny Roller

Brass Roller used for detailing.



## SILICON ROLLER

Silicon Roller

Used to secure Quickseam tapes into place.

## HEAVY DUTY SCISSORS

HEAVY DUTY SCISSORS



## HEX NUT DRIVER

Hex nut driver

Magnetic, used for screwing Hex Tech fixings into Plastisol trims.

## QUICKSCRUBBER KITS

Quickscrubber Kit includes :-Quickscrubber Pads 30 Pads  
Quickscrubber Handle X 4  
Also available individually

Used to apply Quickprime Plus to rubber membrane.  
It applies the primer at the same time  
as cleaning the membrane.



## EXTENSION ROLLER

EXTENSION ROLLER  
Used to remove creases in EPDM



## SPRAY GUN

High quality spray gun to work with the 17kg spray canisters.

Also available with extended nozzle for easy and controlled application.

## SPRAY GUN 4M HOSE

4M rubber hose for use on the 17kg spray canisters.



# Orders 0800 161 3722


# Insulation and accessories

## KINGSPAN TR27

Kingspan Thermarroof TR27 LPC/FM is a high performance insulation with a fibre-free rigid thermoset polyisocyanurate (PIR) core.

With a thermal conductivities as low as 0.024 W/m·K, it is used to insulate flat roofs waterproofed with fully adhered single-ply, partially bonded built-up felt, mastic asphalt and cold liquid applied waterproofing.

**Available in 25MM, 50MM, 100MM or 120MM**

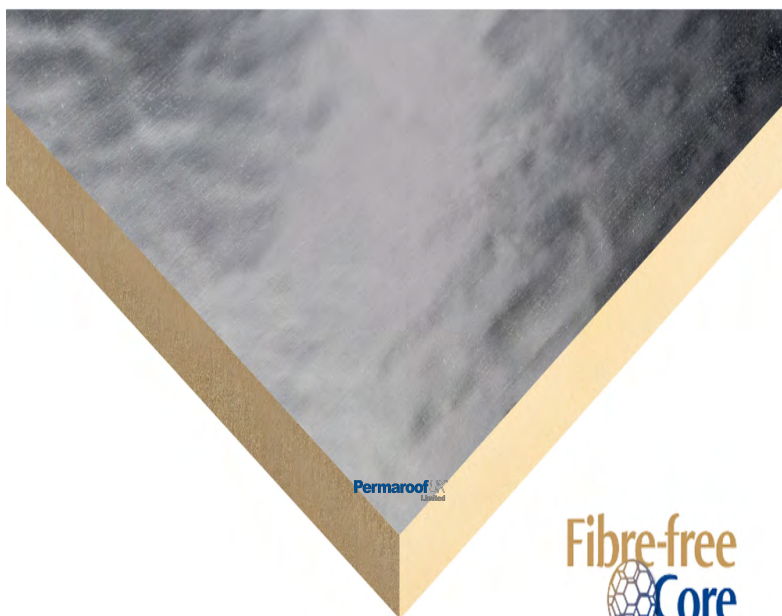

## KINGSPAN TR26

Kingspan Thermarroof TR26 LPC/FM is a high performance insulation with a fibre-free rigid thermoset polyisocyanurate (PIR) core.

It is suitable for flat roofs waterproofed with mechanically fixed single-ply waterproofing, and has a thermal conductivity of 0.022 W/m·K.

**Available in 25MM, 50MM, 100MM or 120MM**


# Orders 0800 161 3722

# Insulation and accessories

## Tapered Roofing Service

Kingspan Thermataper eliminates the need for a structural fall and offers a number of practical advantages to both specifiers and installers. The lightweight boards are easy to handle and are fitted with a dry installation process. This can greatly reduce project timescales when compared with wet approaches such as screed to fall which can take 195 days, or more, to dry.

In refurbishment applications, they can typically be installed above the existing roof surface (with a waterproof membrane), avoiding the time-consuming process of stripping the existing roof.

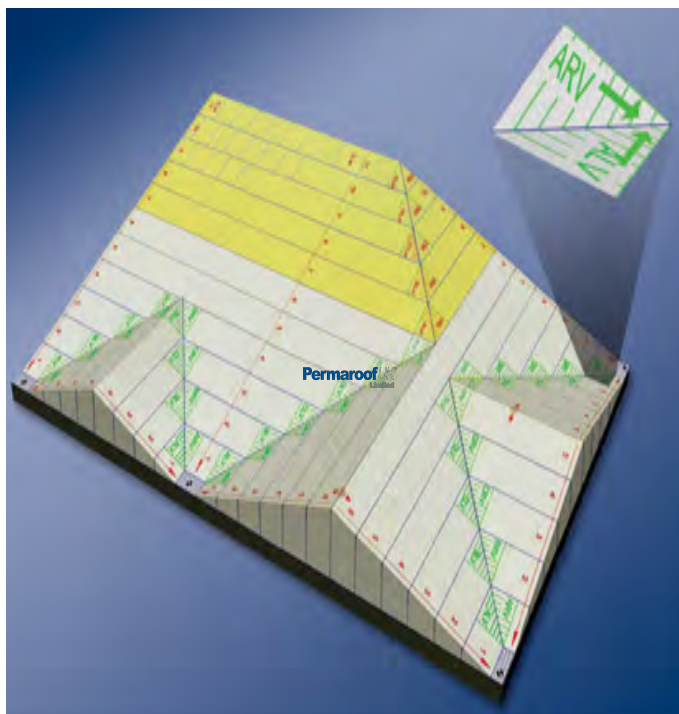

## TUBE WASHERS

The Fastec R 75 range of tube washers is designed for the mechanical attachment of insulation. The low-profile head design and narrow tube diameter improves aesthetics and aids installation. Compatible with Fastec RS 4.8 and HD 6.3 Fasteners.

**Available in 105MM for 120mm insulation and 35mm for 50mm insulation**



## HD FASTENERS

The Permaroof HD 6.3 range is designed to fasten to structural concrete and timber decks, primarily for use with the Permaroof tube washer range.



# Orders 0800 161 3722

## PERMAROOF 500 EMBEDMENT COAT

AVAILABLE IN 25KG AND 6KG TINS

Permaroof 500 Liquid Membrane is used to waterproof the main area (in 1 layer) using the accelerator (at a ratio of 110ml per Litre, 500ml per 6kg or 2 Litres per 25kg).

Coverage

6kg 3m<sup>2</sup> - 4m<sup>2</sup>

25kg 15m<sup>2</sup> - 16m<sup>2</sup>



## PERMAROOF 500 PU PRIMER

AVAILABLE IN 5KG TINS

is a mono-component, low viscosity, high solids content. It has been specifically designed to increase bonding and improve the surface leveling of the substrates prior to the application of the Permaroof 500 Liquid Membrane

Coverage

5kg 25m<sup>2</sup>



## PERMAROOF 500 UV TOP COAT

AVAILABLE IN 25KG AND 6KG TINS

The use of Permaroof UV top coat is recommended to increase UV stability, for trafficable areas or achieve extended guarantees.

Coverage

6kg 4m<sup>2</sup> - 5m<sup>2</sup>

25kg 21m<sup>2</sup> - 22m<sup>2</sup>



## BREATHER MEMBRANE

Eco Breather Membrane 1M x 50M

Roll Permavent black 1M x 50M Roll



Permavent max 1M x 50M Roll



Permavent Eco 1M x 50M Roll 1.5M x 50M



For use on all types of domestic and commercial roofing and walling applications, including:

- cold non vented
- traditional hybrid
- cold vented

Scottish and fully boarded applications suitable for use in all applications\*. (Wind Zones in the UK for underlays used for specific applications as described in BS 5534)

Permavent use the very latest technology from the medical industry to encapsulate the highest grade hydrophobic film inside the very highest quality spunbond polypropylene layers. Unlike other companies, who simply stick the different layers together, Permavent membranes are manufactured in a single process that greatly improves the quality and integrity of our membranes. This 3 in 1 process means that Permavent offer the best performing breather membranes in their class with superior strength, breathability, flexibility and durability.

PERMAVENT MEMBRANES ARE CERTIFIED FOR USE IN ALL TYPES OF ROOFING AND WALLING APPLICATIONS AND CONFORM FULLY WITH:

BS 5250: 2011 CODE OF PRACTICE FOR CONTROL OF CONDENSATION IN BUILDINGS.

BS 5534: 2014 CODE OF PRACTICE FOR SLATING AND TILING.

BS 8000-6: 1990 WORKMANSHIP ON BUILDING SITES.

BS EN 1991-1-4; 2005 +A1; 2010 +UK NA.

BS EN 13859: FLEXIBLE SHEETS FOR UNDERLAYS.

BS EN 13501-1 2007.

# Orders 0800 161 3722


## PERMAROOF GUTTER BRUSH

Permaroof Gutter Brush 4M X 100MM

A continuous polypropylene brush which prevents the build up of wind blown debris.

Available in black, white or brown.

Colours Available

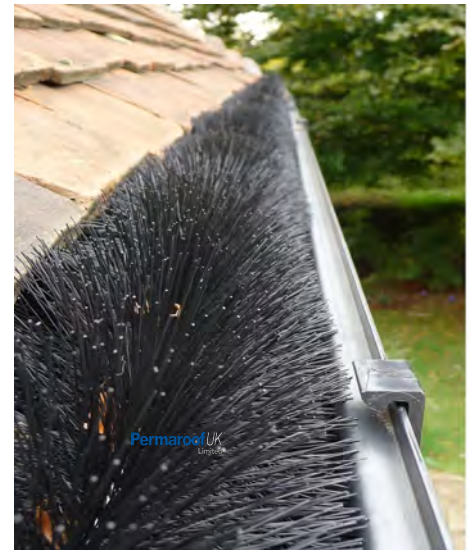

## GEOTEXTILE

Geotextile Roll 50M x 2M

Geotextile Roll 100M x 2M

Or per m2

240 gsm

Used when doing an overlay system.

Isolates the rubber membrane against chippings on roof etc and stops any abrasions.

## OSB 3 BOARD 8MM & 18MM

Available for collection

Site drops available for pallet quantities.

It is versatile, strong and cost-effective. Manufactured with exterior resins, SMARTPLY OSB3 board is suitable for both interior and exterior structural applications.



# Orders 0800 161 3722



## ACCESSORIES & EXTRAS

### GLASS CLEANER 1LTR

Suitable for manually cleaning windows, mirrors, glazing and windscreens.



### SOLVENT CLEANER 1LTR

Suitable for the removal of grime, excess grease, ingrained marks and uncured silicone from uPVC windows and door frames.



### WONDER WIPES

- Multi use Wonder Wipes have become the first choice wipe of the nations Builders and Tradesmen
- Cleans hands, tools, surfaces from wet, semi-cured paint, sealant, adhesive, bitumen, expanding foam, oil, grease and even silicone
- Particularly useful when there is no water on site
- Independently tested to BSEN 1276:1997 and BSEN 12054:1995, the standards for killing bacteria on dirty surfaces and hands
- Resistant to MRSA, Salmonella, Listeria and E.Coli



PermaroofUK Limited

# Orders 0800 161 3722



## ACCESSORIES & EXTRAS

### GREEN ROOFS

Available to order

A green roof or living roof is a roof of a building that is partially or completely covered with vegetation and a growing medium, planted over a waterproofing membrane. It may also include additional layers such as a root barrier and drainage and irrigation systems.

#### Key Benefits

- Environmentally friendly
- Can be an aid to planning (Breeam)
- Increased life expectancy to water proofing
- Keeps roofs cooler in the summer and warmer in the winter
- Aesthetically pleasing
- Recreating habitat



### PERMAROOF EMERGENCY REPAIR

- Waterproofs instantly
  - Only one coat needed for fast repairs
- Ready to use straight out the tin – no catalysing or mixing components required
  - Ideal for general maintenance work
- Contains fibres that provide extra strength for the coating and interlace to cover small gaps or cracks
- Cold applied for maximum safety – no risks from open flames and other hot works
- Suitable for application in temperatures as low as 5°C or as high as 25°C
  - Rainfall after application has no adverse effect

**Orders 0800 161 3722**



## SALES TOOLS

### SAMPLE ROOF

Small display model to show membrane and trims. Available in Permaroof trim, Permaroof Plus trim & EPDM edge trim.



### MARKETING PACK FOR EPDM

- Sample roof
- Penny roller
- Silicon roller
  - Scissors
- Tape measure
  - Crayon
- 100 x Firestone brochures
  - 100 x EPDM samples
  - Van stickers

Available in all trim styles to order



# Orders 0800 161 3722

**Check out our PermaLawn and  
Rooflights catalogues to see  
more of our product range**


## PermaLawn

High quality, durable and  
affordable artificial grass.



## Rooflights

Easy to install rooflights that  
offer security for the home.

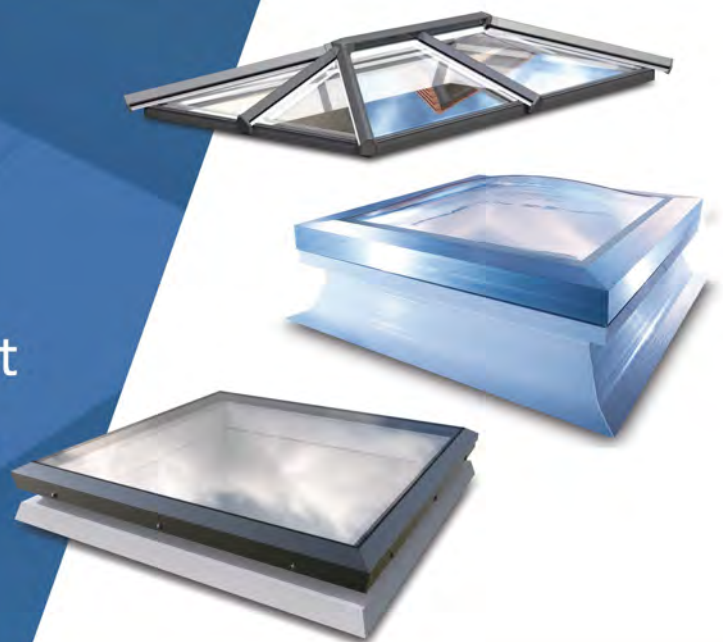

Visit [www.perma-lawn.co.uk](http://www.perma-lawn.co.uk) or  
[www.theskylightcompany.co.uk](http://www.theskylightcompany.co.uk) to find  
out more or call **0800 161 3722**